
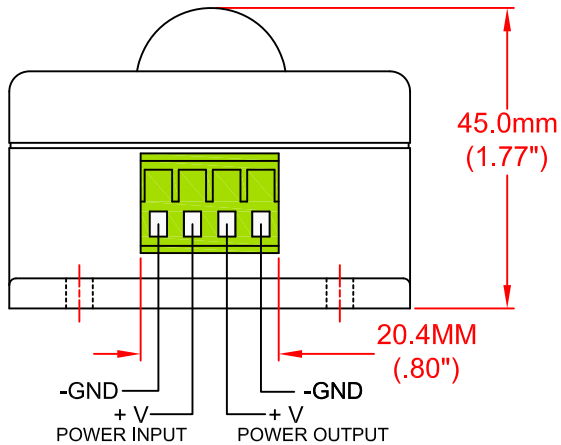


## FEATURES:

- 12 OR 24 VOLTS DC OPERATION
- 96 WATT HANDLING CAPABILITY AT 12V
- 192 WATT HANDLING CAPABILITY AT 24V
- WIDE SENSOR FIELD OF VIEW

REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	9/30/13
A	CHANGE DIMENSION 89.0 TO 64.0	10/24/13
B	CHANGE 24V WATT TO 192	2/24/14

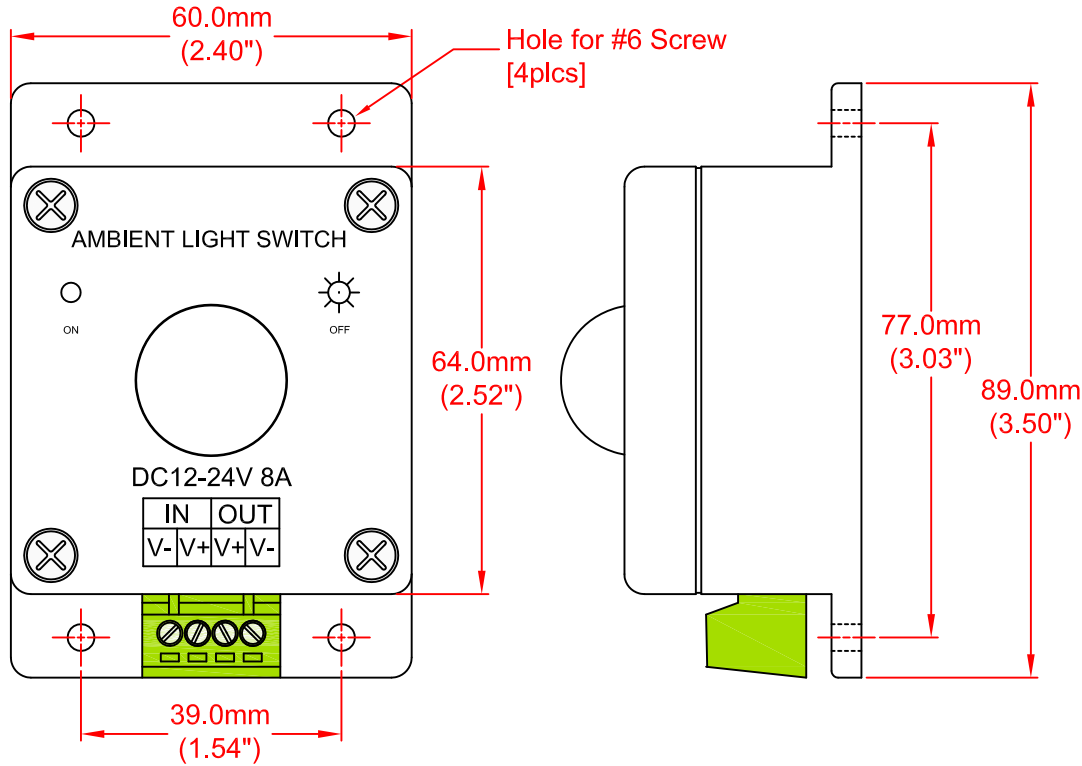

## RATINGS

CHARACTERISTICS	UNIT	MINIMUM	MAXIMUM
Input Voltage	Volts DC	12	24
Load Current	Amps	8	8
Operating Temperature	Degrees C	-20	60
Trigger Range ON	Lux	85	
Trigger Range OFF	Lux		215

JKL PART NO.: ZCTR-04

METRIC		DIMENSIONS ARE IN mm (INCHES)		JKL COMPONENTS CORPORATION			
 THIRD ANGLE PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/- REF.		TITLE			
				PHOTO SENSOR SWITCH			
DRAWN BY	APP'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.	ZCTR-04	
L. WENGSTROM	L.R.	2/24/14	A	55335			
- CAD DRAWING -			SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
MANUAL REVISIONS NOT PERMITTED			NOT TO SCALE	9/30/13	2/24/14	B	1 OF 1